

EWOS8HP-5V0-A-C4

High performance OCXO for underwater systems

PRODUCT OVERVIEW


EWOS8HP-5V0-A-C4 is a very low aging and ultra low power consumption OCXO dedicated to underwater systems. Built around a SC-cut resonator, it combines a low aging drift and an extremely low power consumption at a record 122 mW at 25°C. It can be used in many underwater systems and provides an excellent holdover precision time for battery powered devices like Underwater Autonomous Vehicles. Supplied with 5V, it delivers an high stability 8.192 MHz frequency output and a very low thermal sensitivity at ± 10 ppb (typ.)



KEY FEATURES


- 8.192 MHz HCMOS output
- ± 10 ppb (typ.) thermal sensitivity
- 122 mW (typ.) @ 25°C
- $\pm 0,05$ ppb/day after 30 days (typ.)

DIMENSIONS & PIN-OUT

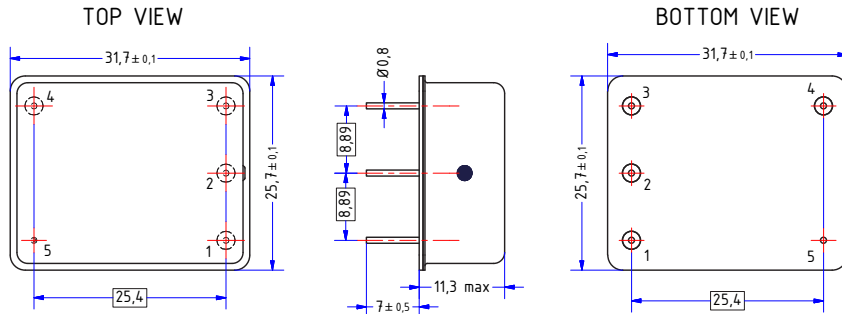

PIN NUMBER	FUNCTION
1	Frequency control
2	Reference Voltage
3	Power Supply
4	RF Out
5	Ground

ORDERING INFORMATION

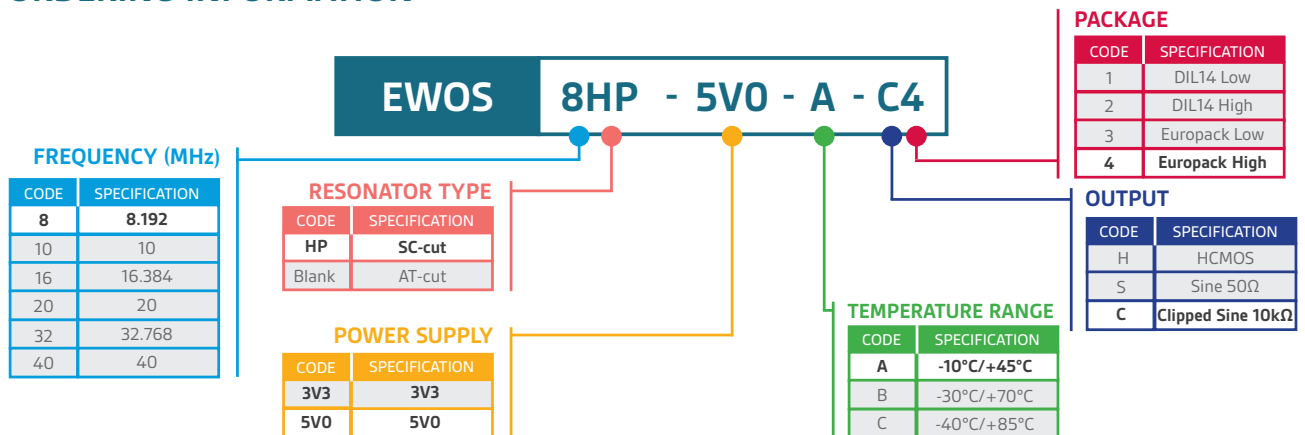

ELECTRICAL CHARACTERISTICS

PARAMETERS	Unit	Min	Typ.	Max	Note	Comments
Output Frequency	MHz		8.192		1	
Temperature Range						
• Operating	°C	-10		+45		Stay functional at +50°C but stability may not be met
• Storage	°C	-30		+95		
Supply Voltage	V		5.0			±5%
Supply Current						
• Warm-up	mA			220	3	During 20s max @25°C / 40s max @ 5°C
• Steady state / -10°C	mA		50	54	1	
• Steady state / +5°C	mA		39	44	1	
• Steady state / +25°C	mA		24	29	1	
• Steady state / +45°C	mA		11	14	1	
Frequency Stability						
• Initial frequency accuracy	ppm		±0.1	±0.2	1	+25°C referred to nominal frequency. Control Voltage 1.8V peak to peak drift
• Vs operating temperature range	ppb		±10	±25	1	
• Vs supply voltage variation	ppb			±2	3	5V ± 5%
• Vs load	ppb			±2	3	(10 kΩ//15 pF) Load ± 10%
• Short-term	(τ=0.1s)	10 ⁻¹¹	0.5	1	3	Allan deviation @ 8.192 MHz
	(τ=1s)	10 ⁻¹¹	1	5	3	
• Aging						
	Per day	ppb	±0.05	±0.3	3	After 30 days
	First year	ppb		±50	3	
	After 10 years	ppb		±300	3	
• Acceleration sensitivity	ppb/G		±1		3	Worst direction
• Warm-Up Time	sec			30	3	To ±1 ppm of final frequency obtained after 1 hour @ 25°C
	min			3	3	To ±100 ppb of final frequency obtained after 1 hour @ 25°C
• Retrace	ppb			±10	3	24h work after 24 off
Phase Noise @8.192 MHz						
• 1 Hz	dBc/Hz		-90		2	
• 10 Hz	dBc/Hz		-120		2	
• 100 Hz	dBc/Hz		-135		2	
• 1 KHz	dBc/Hz		-145		2	
• 10 KHz	dBc/Hz		-145		2	
Clipped sinewave output parameters						
• Output Level	Vpp	0.8	1	1.5	3	Clipped sinewave - DC cut - Load 10kΩ//10 pF
• Output Impedance	kΩ		1		3	
	pF		5		3	
Frequency Tuning						
• Reference Voltage	V		4.0		3	
• Tuning Voltage	V	0		4.1	3	
• Tuning Range	ppb	±200	±400		2	
• Tuning Slope			Positive		3	
• Tuning Input Impedance	kΩ		100		3	
	pF		100		3	
Weight	grams		15			

Notes

1. Parameter inspected at 100% | 2. Parameter inspected by sampling | 3. Parameter guaranteed by design and characterization

ENVIRONMENTAL CONDITIONS

Shocks	1500G peak / 0.5 ms / 3 axis ; MIL-STD-883 method 2002, Test Condition B
Vibrations	16.91 Grms / 10 to 2000 Hz Random / 3 min per axis, MIL STD 202-214 cond E
Soldering instructions	Hand soldering with recommended pins temperature: 235°C ±5°C, t=10s ±05s (260°C max for 5s max) Selective wave soldering with limitation of pre-heating to reach the max temperature of 85°C (body of component) and 3 s max at max temperature Use of no-clean solder paste When connecting a pad to a copper plane, thermal pads are recommended
Mounting instructions	Metallic Case glued onto the PCB, without glue overflow into the metallized holes No spacer material between OCXO and PCB
PCB cleaning/washing	Washable with a temperature below 85°C

OCXO HERMETICITY

Metallic housing hermetically sealed	
Fine Leaks and Gross Leaks tests performed 100%	

EWOS8HP-5V0-A-C4, V1.2 | Updated on 7th September 2023 | This document is the property of Syrlinks. Information contained is not contractual & is susceptible to modifications without advance notice.